

D21B

21.5" Wide-screen Industrial Display

D21 industrial display supports VGA, DP and HDMI standard display port input, with OSD adjustment function and touch screen operation. The front panel adopts full-plane design, and the high-strength aluminum alloy surface frame is compatible with resistive screen and capacitive screen of the same size. The structure takes into account the installation methods such as embedded, wall-mounted and VESA standard mount.

D21 is mainly used in various industrial display fields such as industrial MES production line, integrated monitoring (buildings, rail transit and power), equipment control (CNC machine tools and monocrystalline furnaces).



Product Features

- 

21-inch high-brightness LED LCD
- 

Automatic calibration and adjustment
- 


IP65 protection grade
- 

Supports VGA, HDMI and DP display
- 

Resistive/capacitive touch screen optional
- 

Fully sealed without fan

Product Dimensions Drawing

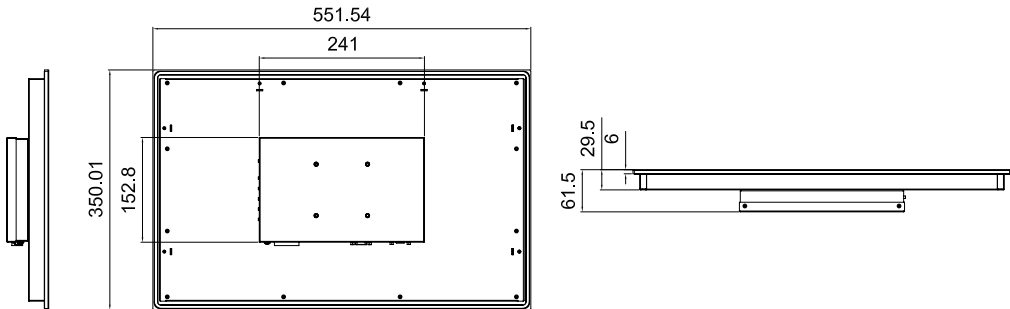

(Please refer to the user manual to check detailed specifications and dimensions) (unit: MM)

Product Specifications

Item		Description		
Characteristics of LCD screen	Display Size	21.5" 16:9 wide-screen	Frequency	60Hz
	Maximum Resolution	1920×1080	Dot Pitch	0.24795(H)mm×0.24795(V)mm
	Brightness	≥250cd/m2 (bare screen)	Display Color	16.7M color
	Contrast Ratio	1000:1	Visual Angle	CR≥10
Touch Controls		Capacitive screen, full plane, 10-point touch control		
		Resistive screen, 5-wire resistive screen, single touch		
Display Function		Supports VGA, DP and HDMI standard port input		
External I/O Port		1x Type-B USB2.0 input port (for touch) 1x VGA input port 1x DP input port 1x HDMI input port 1x power input port		
OSD Menu		Supports brightness/contrast, graphic adjustment, color temperature adjustment, reset, and automatic correction and other functions		
Mechanical Environment Adaptability		Start-up vibration resistance: frequency: 5~15Hz, amplitude: 1mm; frequency: 15~200Hz, acceleration: 1.0g Shock: 15g acceleration, 11ms duration		
Reliability		Mean time between failures (MTBF) ≥ 50000H; mean time to repair (MTTR) ≤ 0.5h		
Safety		GB 4943.1-2022		
EMC		GB/T 9254-2021 Radiated Disturbance Class (A) GB/T 9254-2021 Conducted Disturbance Class (A) GB/T 17626.2-2018 Electrostatic Discharge Class (2) GB/T 17626.4-2018 Burst Immunity Class (2) GB/T 17626.5-2019 Surge (Shock) Immunity Class (2) GB/T 17626.6-2017 Conducted Immunity Class (2)		
Working Environment		0°C~50°C		
Storage Environment		-20°C ~ 65°C; humidity: 5% ~ 95% (non-condensing state)		
Installation Method		Panel embedded, wall-mounted, VESA, etc.		
Product Dimensions		551.5mm (W) × 350mm (H) × 61.5mm (D)		
Weight		About 7.10Kg (excluding the weight of package and accessories)		
Power supply		Input voltage/frequency: 220VAC/50Hz (with adapter) Input voltage: 12VDC (without adapter, direct input to the chassis)		
Protection Grade		The front panel supports IP65 Protection Grade		

Ordering Information

Part No.	Model	Description
0010-185581	D21C-B01	D21C-B01/VGA+DP+HDMI/21.5" screen/capacitive touch/adapter
0010-185591	D21R-B01	D21R-B01/VGA+DP+HDMI/21.5" screen/resistive touch/adapter

Note: EVOC Intelligent reserves the right to final interpretation of product specifications and ordering information etc.